


IR8F16 Front Terminal Battery Rack

Features:

-  UL Listed 5th Edition.
- IBC 2018 Seismic Certified.
- Designed for 30 standard 16 volt front terminal batteries in 480VDC nominal configuration.


- Rack Mechanical Features:
 - Frame made with welded heavy gauge steel
 - Steel tubing used in the main frame components
 - Frame painted with acid resistant powder coat paint
 - Front and back accessible to standard material handling equipment
 - Dedicated area for output connections and cable routing
 - Battery connections are accessible from all sides of the rack
 - Rack top designed for output cables from adjacent racks
 - Designed to accommodate monitor harness installation
 - Large gland plate can be used for conduit or raceway mountings
 - Poly-carbonate fronts covering open battery area

- System Electrical Features:
 - DC rated breakers and their options are available in each rack
 - Breaker installed horizontally to lessen the chance of opening during a seismic event
 - Accommodates multiple manufacturers' breakers
 - Breakers connected in split string method (20 Batteries - Breaker - 20 Batteries)

- Optional Items:
 - Breaker installed mid-rack to lower the height of the breaker
 - Breaker lockout hasp (padlock not included)
 - Poly-carbonate fronts covering open battery area
 - Seismic Anchor Brackets
 - Spill Containment Pan System
 - Installation of battery monitors or harnesses
 - Crating available for sea freight with vapor seal

Designed for the Energysys 16HX800F and 16HX925F front terminal batteries.
Designed for 480VDC nominal battery systems.

For applications assistance, please contact sales@IntraPack.com or call 214-348-7105

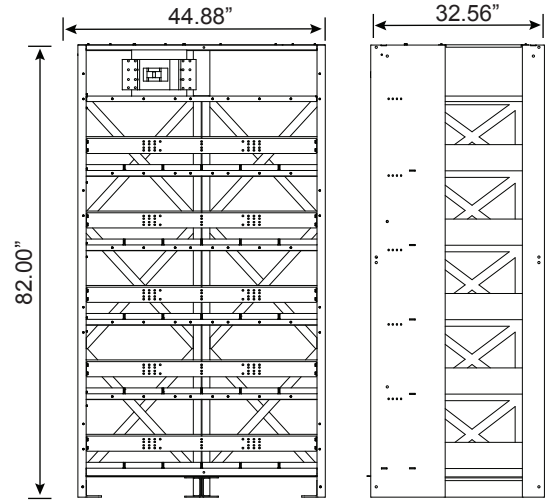


Front View

Right Side View

Dimensions for the frame only

All panels and doors are removable for ease of maintenance.

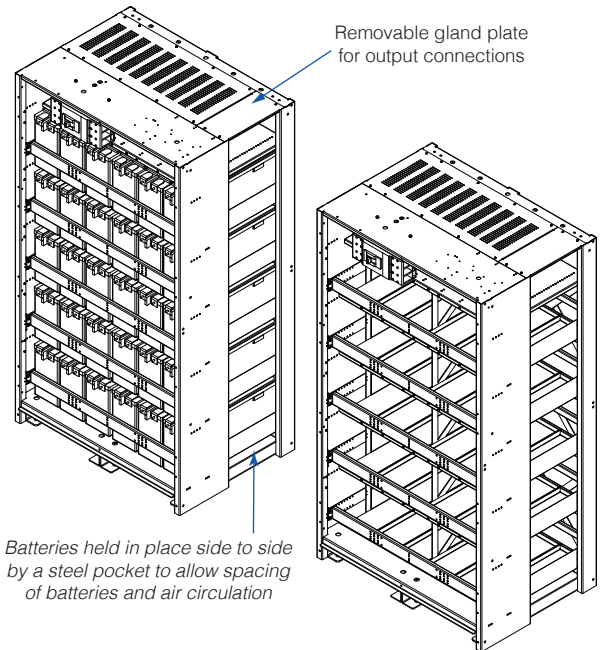


Removable gland plate for output connections

Batteries held in place side to side by a steel pocket to allow spacing of batteries and air circulation

All dimensions shown in inches.

Top view and bottom view shown with panels.
 Each panel adds 0.192" to the width.

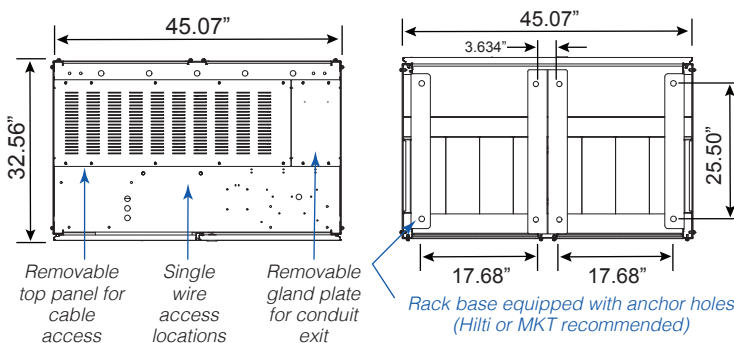

Removable top panel for cable access

Single wire access locations

Removable gland plate for conduit exit

Rack base equipped with anchor holes (Hilti or MKT recommended)

Effective Date: 02/12/20



An Investment in Reliability.

IntraPack Industries • 10650 Markison Road • Dallas, Texas 75238 - 1338
 Tel: 214-348-7105 • Fax: 214-348-7115 • Email: sales@IntraPack.com